

★ Snap-tite 61 Series — ISO A Interchange

Featuring... Snap-tite quality with superior pressure and flow characteristics over the competition




- Interchangeable with other manufacturers offering ISO Series A couplings.
- Dimensional & performance requirements conform to ISO 7241-1 Series A
- 4:1 Safety Factor
- Proven ball-lock mechanism provides positive connection
- Poppet style shut-off
- High strength steel construction
- Zinc yellow dichromate plating for corrosion resistance
- Choice of seal materials to handle a variety of fluids
- Sizes 1/4" – 1"

Snap-tite's 61 Series is designed to conform to the dimensional and performance requirements of ISO 7241-1 Series A, which details the testing, performance and dimensions of the nipple. This is to enable interchangeability with couplings produced by other manufacturers who meet the same standard. Snap-tite's 61 Series features superior working pressures, flow characteristics and safety factors, making the 61 Series the premier ISO Series A interchange.

PRESSURE RATINGS


SIZE	MAXIMUM WORKING		MINIMUM BURST		MAXIMUM CONNECT BY HAND	
	PSI	BAR	PSI	BAR	PSI	BAR
1/4"	4,600	317	18,400	1269	150	10
3/8"	4,600	317	18,400	1269	150	10
1/2"	4,000	276	16,000	1103	100	7
3/4"	4,000	276	16,000	1103	50	3
1"	3,000	207	12,000	828	40	3

TECHNICAL AND DIMENSIONAL INFORMATION

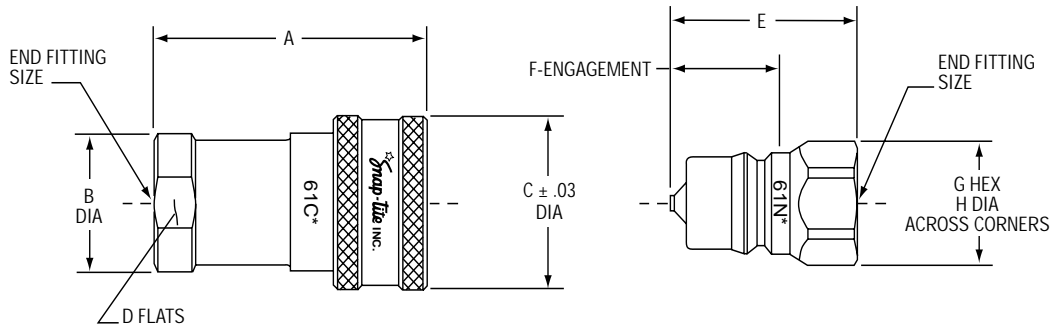

SIZE	A		A (SAE)		B		C		D		E		E (SAE)		F		G		H	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
1/4"	1.94	49.28			.88	22.35	1.06	26.92	.75	19.05	1.45	19.05			.64	16.26	.75	19.05	.83	21.08
1/4" x 3/8"			1.94	49.28	.88	22.35	1.06	26.92	.81	20.57			1.45	19.05	.64	16.26	.81	20.57	.89	22.60
3/8"	2.34	59.44			1.06	26.92	1.27	32.25	.88	22.35	1.76	44.70			.82	20.83	.88	22.35	.96	24.38
3/8" x 1/2"			2.34	59.44	1.06	26.92	1.27	32.25	1.00	25.40			1.76	44.70	.82	20.83	1.00	25.40	1.10	27.94
1/2"	2.71	68.83	2.71	68.83	1.19	30.23	1.50	38.10	1.00	25.40	2.00	50.80	2.00	50.80	1.00	25.40	1.06	26.92	1.17	29.72
1/2" x 5/8"			2.71	68.83	1.19	30.23	1.50	38.10	1.13	28.70			2.00	50.80	1.00	25.40	1.13	28.70	1.24	31.50
3/4"	3.27	83.06	3.27	83.06	1.61	40.89	1.88	47.75	1.38	35.05	2.44	61.98	2.44	61.98	1.31	33.27	1.38	35.05	1.51	38.35
1"	3.68	93.47	3.68	93.47	1.86	47.24	2.13	54.10	1.63	41.40	2.67	67.82	2.67	67.82	1.59	40.39	1.63	41.40	1.79	45.47

FLOW CHART

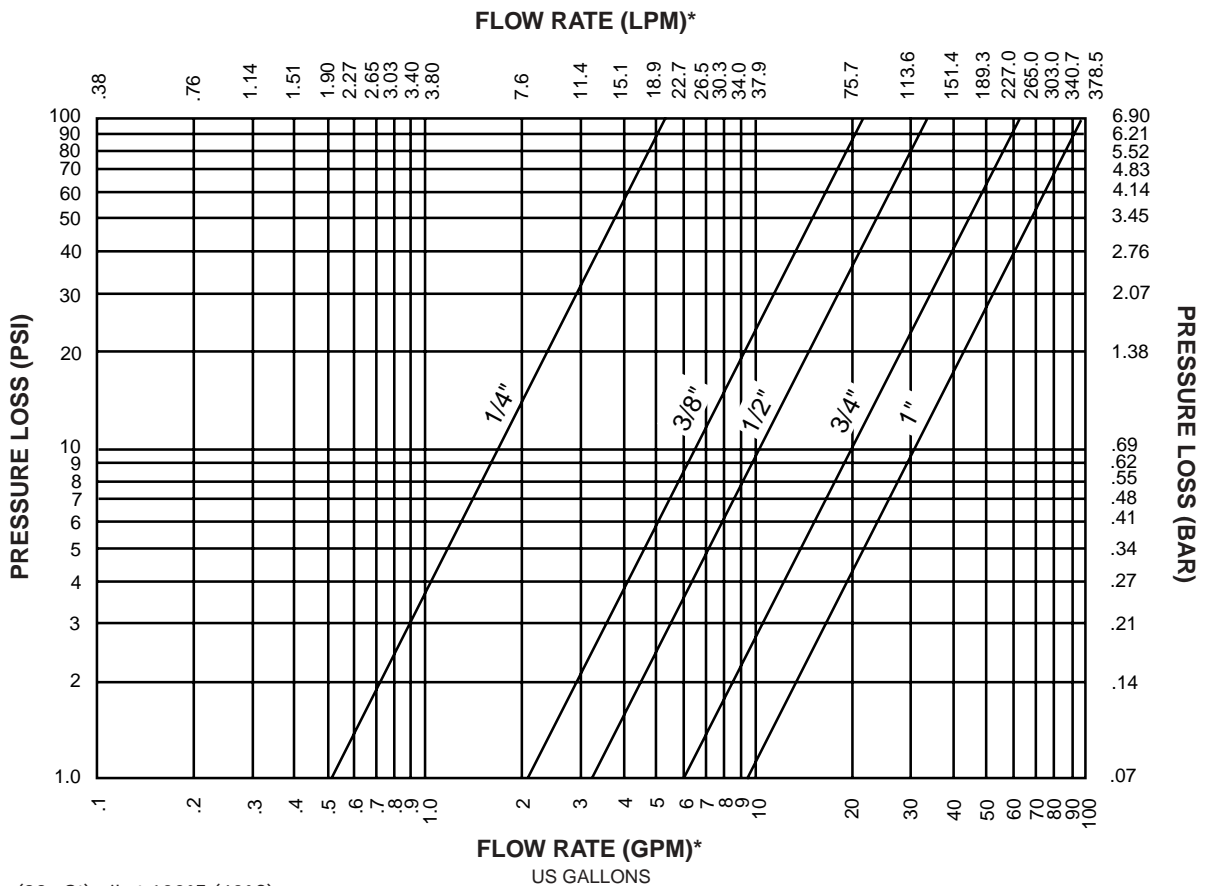

*150 ssu (32 cSt) oil at 100°F (40°C)