


10

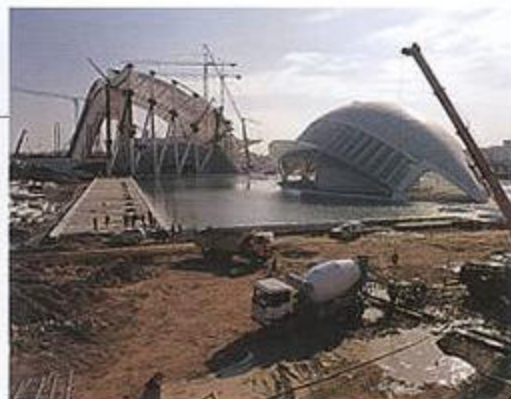

- INDUSTRIAL WASHDOWN
- RINK FLOODING
- FLEXIBLE PIPELINE
- IRRIGATION SUPPLY
- WATER BYPASS SYSTEMS
- SUBMERSIBLE AND PORTABLE PUMP DISCHARGE
- CABLE COVER
- LIGHT WEIGHT SLUDGE SUPPLY
- CHEMICAL SOLUTION TRANSFER

CHARACTERISTICS:

CONSTRUCTION: Extruded synthetic nitrile rubber reinforced with circular woven polyester & nylon.

COLOR: black.

COVER: Ribbed to increase abrasion resistance.

SERVICE TEMPERATURE: -20 °C to +80 °C (-30 F to +180 F).

STANDARD LENGTH: 30, 60 mt; longer lengths upon request (100', 200': longer lengths upon request).



Nominal Ø		Thickness		Weight		Working Pressure		Minimum Burst Pressure		End Pull*		Bend Radius	
mm	inches	mm	inches	gr/mt	lbs/ft	kg/cm2	psi	kg/cm2	psi	kgs	lbs	mt	ft
30	1.25	2	0.08	270	0.18	10	150	30	450	900	1980	0.500	1,640
38	1.5	2	0.08	310	0.21	10	150	30	450	900	1980	0.700	2,296
45	1.75	2	0.08	370	0.25	10	150	30	450	900	1980	0.900	2,952
52	2	2	0.08	450	0.30	10	150	30	450	1300	2860	1.100	3,608
65	2.5	2	0.08	620	0.42	10	150	30	450	1400	3080	1.300	4,264
75	3	2.5	0.10	680	0.46	10	150	30	450	1800	3960	1.450	4,756
100	4	2.5	0.10	950	0.64	10	150	30	450	2400	5280	1.700	5,576
125	5	3	0.12	1450	0.97	10	150	30	450	4200	9240	2.100	6,888
150	6	3	0.12	1650	1.11	10	150	30	450	5000	11000	2.250	8,055
200	8	3	0.12	2250	1.51	10	150	30	450	6600	14000	3.000	9,840
250	10	3.5	0.14	2800	1.88	8	120	24	360	8800	17000	3.300	10,824
300	12	ON REQUEST											

*Figures for End Pull represent 35% of total effective tensile strength